



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Dated 29 January 2004

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**



## Patents Form 1/77

Patents Act 1977  
rule 16)19FEB03 E78435-1/001413  
P01/7700 07:00 0303789.2

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## 1. Your reference

BA-200

## 2. Patent application number

(The Patent Office will fill in this part)

0303789.2

19 FEB 2003

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

CNH Belgium N.V.  
Leon Claeysstraat 3A  
B-8210 Zedelgem  
Belgium

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Belgium

8399081001

TS

## 4. Title of the invention

Apparatus and method for providing hydraulic power to an agricultural implement

## 5. Name of your agent (if you have one)

A. Messulam &amp; Co.

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

A. Messulam & Co  
43-45 High Road  
Bushey Heath  
Herts. WD23 1EE

Patents ADP number (if you know it)

7636210001

TS

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

**Patents Form 1/77**

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form	-
Description	10
Claim(s)	4
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1
Request for preliminary examination and search (Patents Form 9/77)	1
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 19 February 2003

On behalf of CNH Belgium N.V.

Dirk C.A. AMEYE

12. Name and daytime telephone number of person to contact in the United Kingdom

A. Messulam 020 8421 8197

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

- 1 -

**Apparatus and method for providing hydraulic power to an  
agricultural implement**

The present invention relates to means for providing  
5 hydraulic power to an agricultural implement, in  
particular to an apparatus and a method for connecting  
the hydraulic circuitry of an implement to a variable  
source of pressurised fluid, such as a variable rate  
pump, on a vehicle and adjusting the hydraulic flow rate  
10 of the fluid to the implement.

It is well known in the art to provide towed or  
carried agricultural implements with a hydraulic pump,  
e.g. a gear pump, for supplying power to one or more  
hydraulic actuators. Such gear pump can be driven by the  
15 PTO shaft of the agricultural tractor which tows or  
carries the implement. For each apparatus it is possible  
to find an appropriate pump which provides the required  
flow rate and/or pressure. However, the hydraulic pump  
on each implement adds to the cost thereof.

20 Meanwhile it has also become conventional to equip  
medium or top range tractors with a hydraulic pump for  
providing auxiliary power to an implement. One or more  
pairs of standard connectors allow for a direct  
connection of the implement circuitry to the hydraulic  
25 system on the tractor. The operator can control the  
hydraulic components on the implement through handles  
and/or knobs inside the tractor cab. The use of such  
tractor-mounted pumps solves the problem of providing a  
distinct pump on each implement. The pump on the vehicle  
30 may be selected to provide a great maximum flow rate  
which is suitable for the largest implements. However,  
such design will result in a bad overall efficiency as  
for most implements a considerably smaller amount of oil  
is needed, such that most oil is flowing back to the tank  
35 via a pressure relief valve.

- 2 -

It is also possible to use a variable flow rate pump and to adapt the pump output to the needs of the implement. However, the required minimum flow rate may vary substantially per implement and, frequently the operator only notices that the flow rate is too low when the implement is not working adequately. When he adapts the flow rate, he may very well exceed the needed minimum value, such that hydraulic power may be lost unnecessarily.

10 Hence, it is an object to resolve the problems mentioned above and to provide an apparatus and method which ensures a proper setting of the hydraulic flow rate without excess losses of hydraulic energy.

According to a first aspect of the present invention, there is provided an agricultural implement comprising hydraulic circuitry and hydraulic connection means for connecting said hydraulic circuitry to an operator-adjustable source of pressurised hydraulic fluid on an agricultural vehicle, characterised in that said hydraulic circuitry comprises indicator means for indicating to the operator whether a predetermined flow rate of said hydraulic fluid has been reached.

According to a further aspect of the present invention, there is provided a method of providing hydraulic power to an agricultural implement, said method comprising the steps of:

- connecting hydraulic circuitry to an operator-adjustable source of pressurised hydraulic fluid on an agricultural vehicle; and
- 30 - adjusting the flow rate of hydraulic fluid to said hydraulic circuitry,

characterised in that said method comprises the further steps of:

- monitoring an indicator means for indicating to the operator whether a predetermined flow rate has been reached; and

- 3 -

- adjusting said flow rate until said indicator means indicate a flow rate equal to or greater than said predetermined flow rate.

This ensures that the available flow rate at the inlet of the circuitry is sufficient for the adequate operation of the hydraulic actuators of the implement.

In a preferred embodiment the circuitry comprises a flow divider having an inlet port connected to the connection means, preferably quick-acting couplings, a first outlet port connected directly or indirectly to an hydraulic actuator and a second outlet port connected to the indicator means. The flow divider may prevent oil flow to the second port as long as a predetermined flow rate, equal to the minimum flow rate for adequate operation, has not been reached. It may also limit the oil flow to the first port to this predetermined flow rate, while deriving the excess oil flow to the second port.

The indicator means may comprise a pressure-sensitive element connected to a by-pass line which is connected to the second outlet port of the divider, the by-pass line being provided with a flow restrictor. The pressure-sensitive element may comprise a spring-loaded piston, which may be provided with a visual indicator, e.g. a coloured tab. Alternatively, the piston may be provided with means for generating an electrical signal, e.g. an electrical switch. The implement may then be provided with an electrical connector for transmitting the signal to flow rate control means on the tractor for automatic adjustment of the source of pressurised hydraulic fluid. The flow rate signal may also be converted into a digital message which is sent to the tractor via a serial bus, e.g. a CAN-bus.

A spring-loaded check valve may be arranged in parallel to the flow restrictor for limiting the maximum pressure on the indicator.

- 4 -

Advantageously, the flow divider, flow restrictor and piston may be combined into a single valve assembly.

The invention will now be described in further detail, by way of example, with reference to the  
5 accompanying drawings, in which:

Figure 1 is schematic side view of a baler-wrapper combination;

Figure 2 is a representation of part of the hydraulic circuitry of the baler-wrapper combination of  
10 Figure 1; and

Figure 3 is a representation of an indicator valve assembly used in the circuitry of Figure 2.

The agricultural implement shown in Figure 1 is a baler-wrapper combination 10, comprising a round baler 11  
15 for picking up crop material, such as hay or straw, from a field and compressing it into a cylindrical bale, and a bale wrapper 12 for wrapping sheet material, such as plastic film, around the finished bale.

The baler 11 has a support frame provided with a set  
20 of wheels 14 and a tow bar 15 for attachment to a tractor or other towing vehicle. The bale wrapper 12 comprises a subframe 17 which is removably attached to and supported by the support frame of the baler. The baler has a baling chamber 19 wherein the crop material lifted up  
25 from the field by a pick-up 20, is rotated and compressed by appropriate conveyor means. The conveyor means may comprise transverse rollers and/or juxtaposed belts disposed along the periphery of the baling chamber.

When the material inside the bale chamber 19 has  
30 reached its full diameter or its full density, a mechanism (not shown) is operated to tie the crop material into a stable bale. Thereafter, a tailgate 22 at the rear of the baling chamber is opened and the bale 24 is deposited onto a transfer mechanism 26 of the  
35 wrapper 12. This mechanism comprises a fork 27 which



- 5 -

receives the bale 24 and tilts rearwardly in order to deposit the bale upon a wrapping table 30.

The bale wrapper 12 comprises a boom 31 which rotatably carries a pair of dispensers 32 which each hold  
5 a supply of wrapping material. The wrapping table 30 below the dispensers 32 comprises a conveyor 34 for rotating the bale 24. During the wrapping operation the dispensers 32 are rotated around the bale 24 on the wrapping table, while table conveyor 34 is rotating the  
10 bale about its horizontal axis. The sheet of wrapping material is wrapped around the bale until it forms two or more layers around the complete bale surface. Thereafter two knives (not shown) are raised to intercept the wrapping material and then lowered to cut the same and to  
15 hold a tail of the wrapping material in a start position until the next wrapping cycle. Meanwhile the wrapping table 30 is tilted rearwardly to deposit the finished bale onto the field.

Figure 2 shows the hydraulic circuitry 36 used to  
20 control the wrapping operation. The tailgate 22 is opened and closed by a single-acting hydraulic cylinder 38. The fork 27 of the transfer mechanism 26 is tilted by a double-acting hydraulic cylinder 39. The knives are raised and lowered by double-acting cylinders 40 and the  
25 wrapping table 30 is tilted by a pair of double-acting cylinders 41. The conveyor 34 of the wrapping table 30 is driven by a hydraulic motor 42 and the dispensers 32 are rotated around the bale 24 by a further hydraulic motor 43.

30 The circuitry 36 comprises a pair of connectors 45 for connecting the circuitry to an adjustable hydraulic power source on the towing vehicle, e.g. a tractor. Hydraulic power may be provided by a variable displacement pump 47, e.g. a pump having a movable swash  
35 plate, drawing oil from an oil tank 48. The pump may be driven either directly or indirectly by the engine of the

- 6 -

vehicle. Alternatively, the pump may be a fixed flow rate pump which supplies pressurised oil via an adjustable flow divider, such that it is possible to vary the output rate of the tractor circuitry to the implement circuitry 36.

Oil from the pump 47 is fed to a valve assembly 49 and therefrom to the hydraulic actuators 38-43 via an indicator valve assembly 50 which will be described in further detail hereinafter. The valve assembly 49 comprises a pilot controlled distributor valve 52 which receives the pressurised oil and splits the oil flow between a first service line 53 and a second service line 54. The first service line is provided with an electrically controlled, proportional control valve 56 which determines the oil flow rate to the conveyor motor 42 and therefrom to the dispenser motor 43. The serial connection between the two motors 42, 43 ensures a fixed relationship between the rotational speeds of the conveyor 34 and the dispensers 32, such that the wrapping material is disposed adequately over the full surface of the bale 24. The solenoid of the proportional valve 56 is connected to electrical control means which provide for a low speed at the start and at the end of the wrapping cycle and for a full speed in-between.

The action of the proportional valve 56 influences the pressure in the first service line 53 which, through a pilot, affects the position of the distributor valve 52 such that, at any time, the required oil flow is fed to the motors 42, 43. The remainder of the incoming oil flow is deviated to the second service line 54 to which are connected the electrically controlled valves 59, 60, 61 and 62 of the tailgate cylinder 38, the fork cylinder 39, the knife cylinders 40 and the table cylinders 41, respectively.

When no pressurised oil is needed for any of the cylinders 38-41, the control means opens a by-pass valve

- 7 -

64 which branches the second service line 54 directly onto a return line 65.

It is clear from the description above that the setting of the proportional valve 56 fully determines the amount of oil fed to the first service line 53. Hence, when the oil flow rate from the pump 47 is too low and the motors 42, 43 are turning, all available oil will be directed to this first line 53 and the second service line 54 will receive no or only an insufficient amount of oil. Such situation may occur at the end of the wrapping cycle, when the conveyor 34 and the dispensers 32 are driven and the knives have to be raised for cutting the tail of the wrapping material. If no sufficient oil flow is available, the cylinders 40 will not, or only too slowly raise the knives into the path of the wrapping material.

The oil flow rate is even more critical shortly after the start of the wrapping cycle, when the dispensers 32 and the conveyor 34 are already working at full speed. At this stage the first wraps of sheet material are already secured against the bale by the following wraps, but the knives are still seizing the starting tails against the subframe 17. The knives have to be raised and lowered in order to release the tails of wrapping material before they start hampering the rotation of the bale. Initially, the revolution of the bale 24 stretches the tail only on one side of the wrapper 12. The knives have to be raised to release this stretched tail. Meanwhile the other tail keeps dangling between the bale 24 and the subframe 17. Only after half a revolution of the bale 24, also the other tail is stretched and then the knives have to be raised once more to release also the starting tail on this side. As the raised knives extend into the path of the dispensers 32, which are now rotated at full speed, there remains only a very short time interval for raising and lowering the

- 8 -

knives. The knife cycle must take less time than half a revolution of the dispensers. A slow operation of the knife cylinders 40 because of insufficient oil flow will cause interference between the raised or half-raised  
5 knives and the dispensers 32.

Hence it is of the utmost importance that the operator can verify that the tractor pump 47 is set to provide the adequate amount of oil to the implement 10. To this end, the circuitry 36 of the implement is  
10 provided with the indicator valve assembly 50. Herein, a flow divider 67 directs the full oil flow from the tractor pump 47 to the inlet port of valve assembly 49 as long as the oil flow rate remains below a predetermined value. When this value is exceeded, the divider 67 will  
15 limit the oil flow to the valve assembly 49 to this predetermined value and direct the remainder of the oil flow via a by-pass line 68 to the return line 65. The by-pass line 68 is provided with a restrictor 69, such that a pressure differential is created between the by-  
20 pass line and the return line. This differential is sensed at one side of a spring-loaded piston 70 which has at its outer end an indicator tab. The pressure pushes the piston outwardly such that the indicator tab becomes visible to an operator standing between the implement 10  
25 and the tractor.

In order to limit the maximum pressure on the piston 70, the by-pass line 68 has, parallel to the orifice 69, a spring-loaded check valve. As a further safety measure, a pressure relief valve 72 is provided between  
30 the feed line, upstream the inlet port of the flow divider 67, and the return line 65. The flow divider 67, the restrictor 69, the piston 70, the check valve 71 and the pressure relief valve 72 may all be combined into a single valve assembly 50, which may be mounted to the  
35 control valve assembly 49.

- 9 -

When the operator connects the hydraulic circuitry 36 of the baler-wrapper combination 10 to the tractor, he now has the means of verifying whether the pump 47 is set to an adequate oil flow rate. After coupling the connectors 45, he engages the pump 47 and sets the flow rate to a low value. Meanwhile, no cylinders 38-41 or motors 42, 43 are activated. Consequently, the flow divider 67 will direct the full oil flow to the distributor valve 52 and therefrom to the second service line 54 and, via the by-pass valve 64 to the return line 65. Then the operator gradually increases the flow rate of the pump 47 while monitoring the flow indicator. When the flow rate reaches the predetermined value which corresponds to the minimum flow rate for adequate implement operation, the flow divider 67 will deviate part of the oil flow to the by-pass line 68 and the piston will be pushed outwardly. The indicator tab shows to the operator, who is thereby informed that he no longer needs to increase the flow rate. This setting provides for a proper operation of the hydraulic components, without an excess of oil flow which never would be used and which hence would be circulated needlessly through the system.

Although the apparatus and the method have been described with reference to a baler-wrapper combination, other embodiments of the invention can be thought of without departing from the scope of the invention as defined by the claims. For instance, the invention can be used for adjusting the oil flow to other towed or carried agricultural machinery, such as balers, wrappers, hay tedders, mowers, etc. In particular, the invention may prove useful where a single source of hydraulic power is used for a more or less continuously driven component and an intermittently used actuator. The constant flow to the driven component should not hamper the action of the actuator. For instance, there should be no

- 10 -

interference between the rotation of a hay tedder rotor and the lifting action of the support arm of the rotor where repositioning is needed in order to adapt to changing field gradients.

- 5       The pressure indicator may also comprise an electrical switch which is actuated by the movement of the piston. The signal from the switch may then be used for lighting a warning light, e.g. in the vicinity of the flow rate controls, where the operator can readily see  
10 it. The signal may also be used as a feedback signal for adjusting the flow rate of the vehicle in an automatic control procedure.

- 11 -

### Claims

1. An agricultural implement (10) comprising hydraulic circuitry (36) and hydraulic connection means (45) for  
5 connecting said hydraulic circuitry (36) to an operator-adjustable source of pressurised hydraulic fluid (47) on an agricultural vehicle, characterised in that said hydraulic circuitry (36) comprises indicator means (70)  
10 for indicating to the operator whether a predetermined flow rate of said hydraulic fluid has been reached.
2. An agricultural implement according to claim 1, characterised in that said hydraulic circuitry (36) comprises a flow divider (67) having an inlet port  
15 connected to said connection means (45), a first outlet port connected to at least one actuator (38-43) of said implement (10) and a second outlet port connected to said indicator means (70).
- 20 3. An agricultural implement according to claim 2, characterised in that said flow divider (67) is operable to prevent oil flow to said second port as long as said predetermined flow rate has not been reached.
- 25 4. An agricultural implement according to claim 2 or 3, characterised in that said flow divider (67) is operable to limit oil flow to said first port to said predetermined flow rate.
- 30 5. An agricultural implement according to any of the claims 2 to 4, characterised in that:  
said hydraulic circuitry (36) comprises a by-pass line (68) which is connected to said second outlet port and is provided with a flow restrictor (69); and

- 12 -

said indicator means comprises a pressure-sensitive element (70) connected to said by-pass line (68) between said second outlet port and said flow restrictor.

5 6. An agricultural implement according to claim 5, characterised in that pressure-sensitive element (70) comprises a spring-loaded piston.

7. An agricultural implement according to claim 6,  
10 characterised in that said piston (70) is provided with a visual indicator.

8. An agricultural implement according to claim 6,  
characterised in that said piston (70) is provided with a  
15 means for generating an electrical signal, such as an electrical switch or a digital message.

9. An agricultural implement according to claim 8,  
characterised in that said implement is provided with a  
20 connector for transmitting said electrical signal to a flow rate control means of said source of pressurised hydraulic fluid.

10. An agricultural implement according to any of the  
25 claims 5 to 9, characterised in that said hydraulic circuitry (36) comprises a spring-loaded check valve (71) arranged in parallel to said flow restrictor (69).

11. An agricultural implement according to any of the  
30 claims 5 to 10, characterised in that at least said flow divider (67), said flow restrictor (69) and said pressure sensitive element (70) are arranged in a single valve assembly (50).

35 12. An agricultural implement according to claim 11, characterised in that said valve assembly (50) further



- 13 -

comprises a pressure relief valve (72) connected to an input line to said inlet port.

13. An agricultural implement according to any of the preceding claims, characterised in that said implement (10) comprises a baler (11) and/or a bale wrapper (12).

14. A method of providing hydraulic power to an agricultural implement (10), said method comprising the steps of:

- connecting hydraulic circuitry (36) to an operator-adjustable source of pressurised hydraulic fluid (47) on an agricultural vehicle; and
- adjusting the flow rate of hydraulic fluid to said hydraulic circuitry (36);

characterised in that said method comprises the further steps of:

- monitoring an indicator means (70) for indicating to the operator whether a predetermined flow rate has been reached; and
- adjusting said flow rate until said indicator means (70) indicate a flow rate equal to or greater than said predetermined flow rate.

15. A method according to claim 14, characterised in that said monitoring step comprises monitoring a visual indicator means (70).

16. A method according to claim 14, characterised in that said monitoring step comprises monitoring an electrical signal generated by said indicator means.

17. A method according to claim 14, characterised in that said implement is an agricultural implement (10) according to any of the claims 1 to 13 and said

- 14 -

monitoring step comprises monitoring said indicator means (70).

18. A method according to any of the claims 14 to 17,  
5 characterised in that said adjusting step comprises adjusting the flow rate of a variable rate hydraulic pump (47).

19. A method according to claim 18, characterised in  
10 that adjusting step comprises adjusting the position of a swash plate of a hydraulic pump (47).

20. A method according to any of the claims 14 to 17,  
characterised in that said adjusting step comprises  
15 adjusting a flow divider (67) connected between a hydraulic pump and said hydraulic circuitry (36) of said agricultural implement (10).

- 15 -

### Abstract

#### Apparatus and method for providing hydraulic power to an agricultural implement

5

An agricultural implement, such as a baler-wrapper combination (10) comprises hydraulic circuitry (36) for controlling a set of hydraulic actuators (38-43) and hydraulic connection means (45) for connecting said  
10 hydraulic circuitry (36) to an operator-adjustable source of pressurised hydraulic fluid (47) on an agricultural vehicle, e.g. a tractor. The hydraulic circuitry (36) comprises indicator means (70) for indicating to the operator whether a predetermined flow rate of said  
15 hydraulic fluid has been reached, such that adequate operation of all actuators can be assured.

(Figure 2)




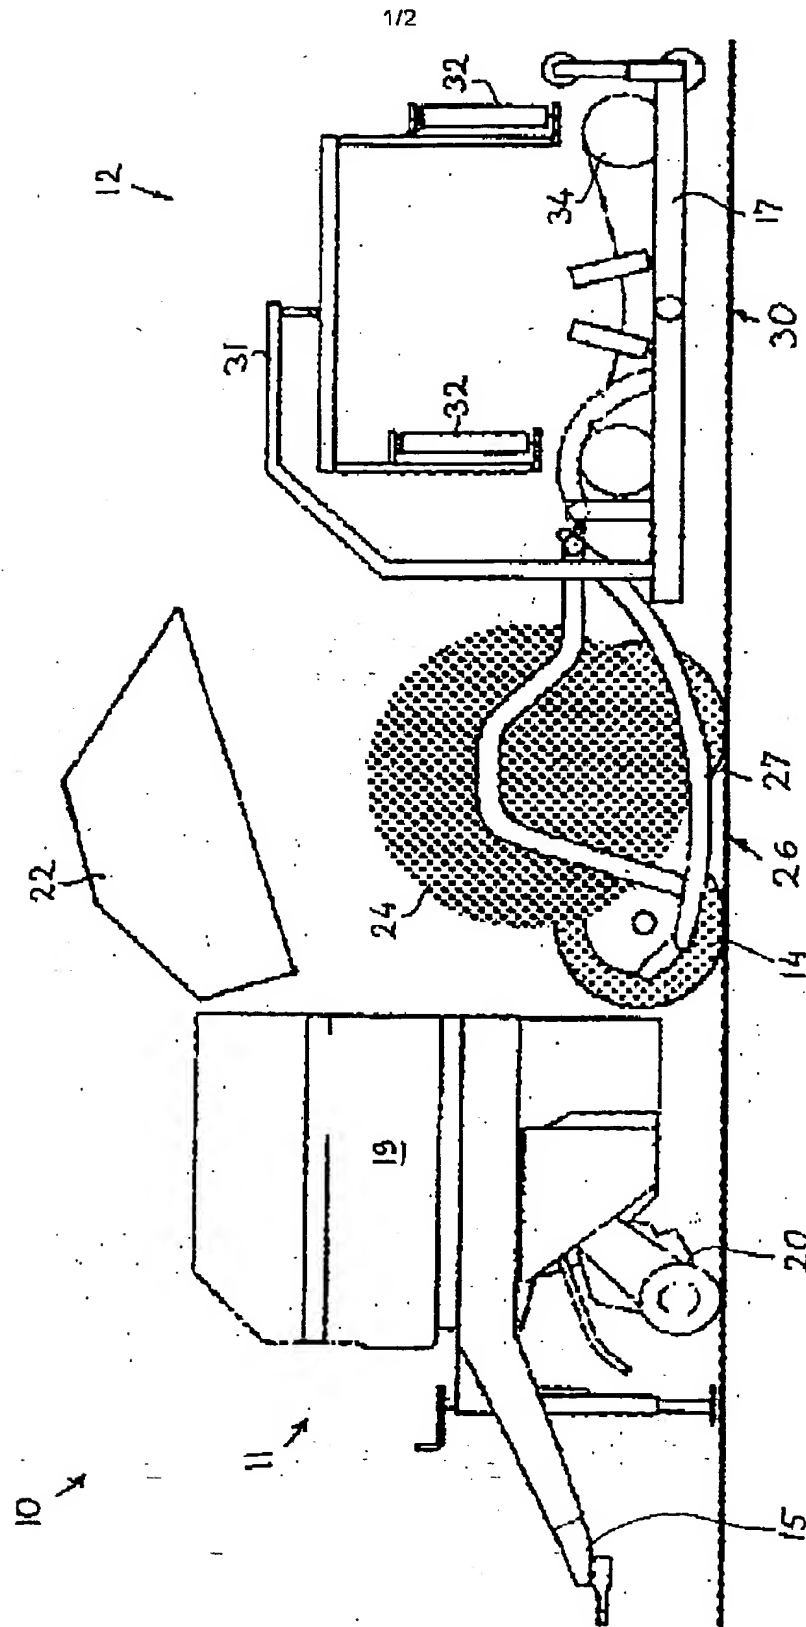


Fig. 1

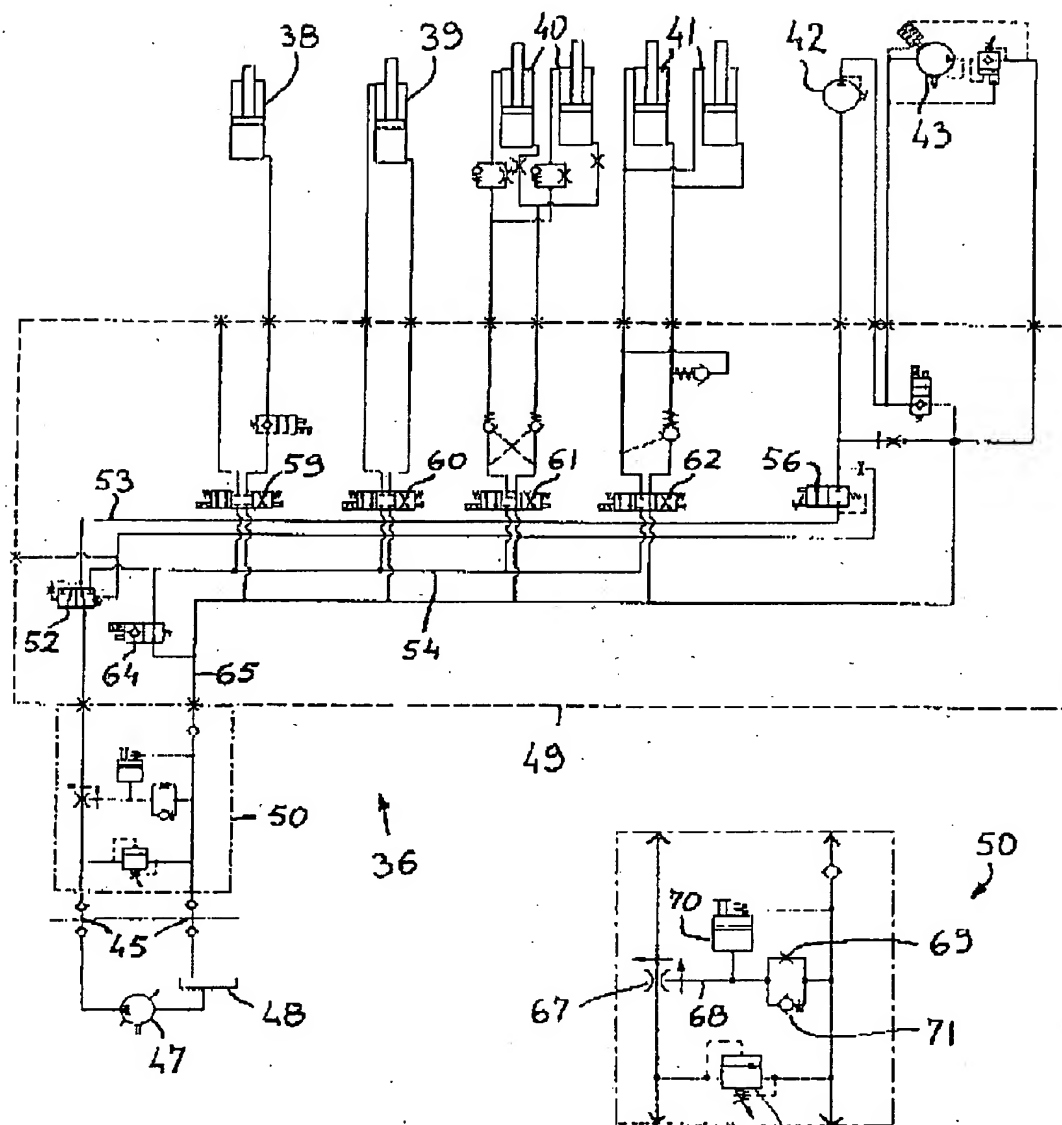

2/2

Fig. 2Fig. 3

10/782, 484